


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 96.16 lm/W			
MODEL	47-STA-5050-120LED	I _{max} (cd)	850.8	S/MH (C0/180)	1.29
NOMINAL POWER (W)	26.55	LOR (%)	100.0	S/MH (C90/270)	1.29
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	2571.7	η UP, DN (C0-180)	0.0, 51.0
NOMINAL FLUX (lm)	2571.69	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	220	η down (%)	100.0	CIBSE SHR MAX	1.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

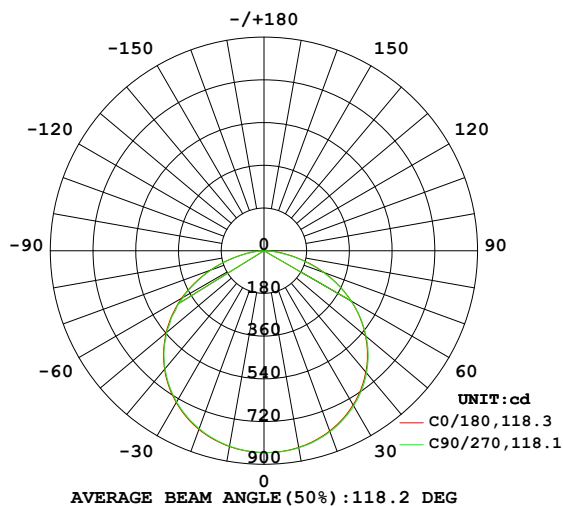

PLANAR ISOLUX DIAGRAM (UNIT:lx)

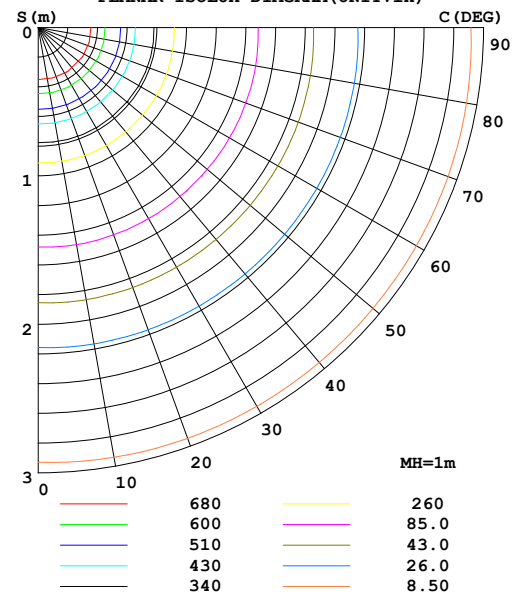

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	841.4	843.8	843.3	840.7	837.8	835.4	835.9	838.7	0- 10	80.67	80.67	3.14,3.14
20	808.4	813.3	812.1	806.7	801.0	796.4	797.9	803.1	10- 20	233.1	313.8	12.2,12.2
30	750.7	757.5	755.4	747.5	739.2	732.9	735.7	743.2	20- 30	358.8	672.6	26.2,26.2
40	667.6	675.9	672.5	662.0	651.9	644.4	648.5	658.2	30- 40	441.6	1114	43.3,43.3
50	558.8	567.4	562.3	549.4	538.6	530.8	535.7	548.3	40- 50	468.3	1583	61.5,61.5
60	424.9	433.0	425.4	410.8	400.3	393.3	391.9	414.1	50- 60	431.6	2014	78.3,78.3
70	269.8	275.8	265.9	251.1	241.2	235.8	236.4	258.4	60- 70	331.2	2345	91.2,91.2
80	110.5	113.2	101.9	90.99	86.60	83.61	82.70	103.0	70- 80	183.7	2529	98.3,98.3
90	1.679	3.258	0.0079	0.0037	0	0	0	0	80- 90	42.46	2572	100,100
100	0	0	0	0	0	0	0	0	90-100	0.0395	2572	100,100
110	0	0	0	0	0	0	0	0	100-110	0	2572	100,100
120	0	0	0	0	0	0	0	0	110-120	0	2572	100,100
130	0	0	0	0	0	0	0	0	120-130	0	2572	100,100
140	0	0	0	0	0	0	0	0	130-140	0	2572	100,100
150	0	0	0	0	0	0	0	0	140-150	0	2572	100,100
160	0	0	0	0	0	0	0	0	150-160	0	2572	100,100
170	0	0	0	0	0	0	0	0	160-170	0	2572	100,100
180	0	0	0	0	0	0	0	0	170-180	0	2572	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

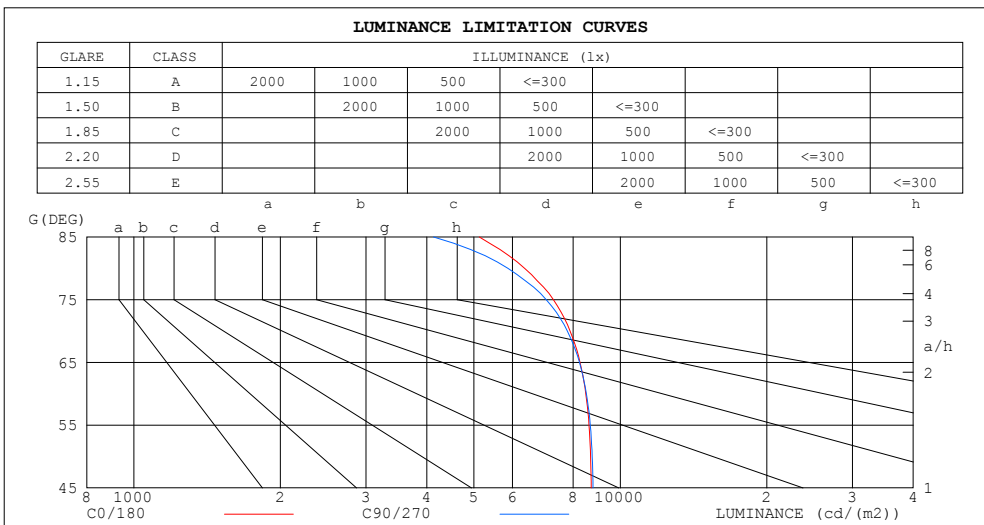

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	5129	4132
80	6356	5874
75	7289	7042
70	7882	7781
65	8265	8242
60	8491	8515
55	8622	8673
50	8686	8755
45	8712	8788


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz		
Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.83	.77	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.35	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.32
8.0	.46	.37	.32	.45	.37	.31	.44	.37	.31	.43	.36	.31	.42	.35	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.40	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.38	.31	.26	.37	.30	.25	.36	.30	.25	.36	.30	.25	.23

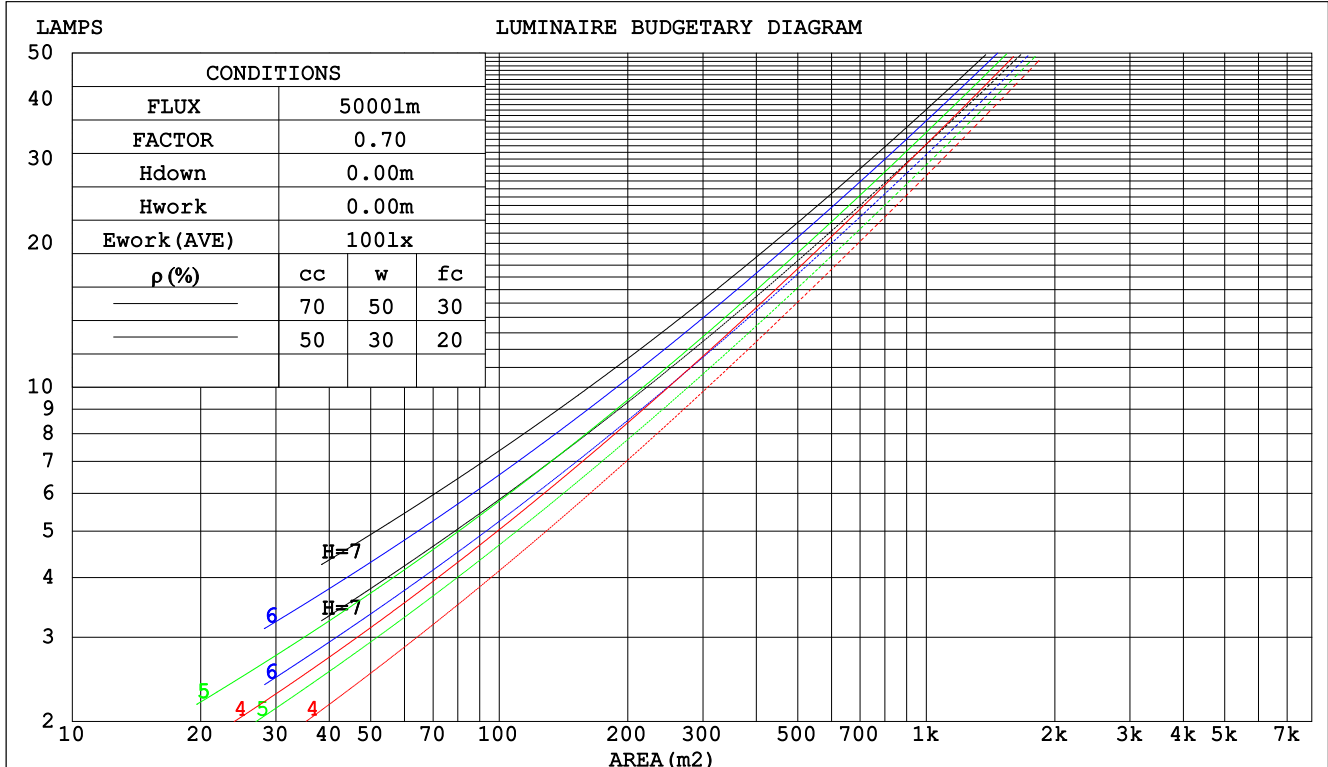

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz		
Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.311	.177	.056	.304	.173	.055	.290	.167	.053	.278	.160	.052	.267	.155	.050	
2.0	.294	.161	.049	.288	.158	.049	.276	.153	.048	.265	.149	.047	.255	.144	.045	
3.0	.272	.145	.043	.267	.143	.043	.256	.139	.042	.247	.135	.041	.238	.132	.041	
4.0	.251	.131	.038	.247	.129	.038	.237	.126	.038	.229	.123	.037	.221	.120	.037	
5.0	.232	.118	.034	.228	.117	.034	.220	.115	.034	.212	.112	.033	.205	.110	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.105	.030	.198	.103	.030	.191	.101	.030	
7.0	.201	.099	.028	.197	.098	.028	.191	.096	.028	.184	.095	.028	.179	.093	.027	
8.0	.187	.091	.026	.184	.091	.026	.178	.089	.025	.173	.088	.025	.168	.086	.025	
9.0	.175	.085	.024	.173	.084	.024	.167	.083	.023	.162	.081	.023	.158	.080	.023	
10.0	.165	.079	.022	.162	.078	.022	.158	.077	.022	.153	.076	.022	.149	.075	.022	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.134	.154	.134	.116	.106	.092	.080	.061	.053	.046	.019	.017	.015	
2.0	.173	.132	.098	.148	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.165	.114	.074	.141	.099	.064	.097	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.135	.087	.050	.093	.061	.035	.054	.036	.021	.017	.012	.007	
5.0	.150	.091	.047	.129	.078	.041	.089	.055	.029	.051	.032	.017	.017	.011	.006	
6.0	.143	.082	.039	.123	.071	.034	.085	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.136	.075	.033	.117	.065	.029	.081	.046	.020	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.029	.112	.060	.025	.077	.042	.018	.045	.025	.011	.015	.008	.003	
9.0	.123	.065	.025	.106	.056	.022	.074	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.118	.060	.022	.102	.052	.019	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm										
NAME:			TYPE:			WEIGHT:				
SPEC.:			DIM.:			SERIAL No.:				
MFR.: EVERFINE			SUR.:			Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.4	18.9	17.6	19.1	19.3	17.4	18.9	17.6	19.1	19.3
3H	19.0	20.4	19.3	20.6	20.9	18.9	20.4	19.2	20.6	20.8
4H	19.6	20.9	19.9	21.2	21.4	19.5	20.9	19.9	21.1	21.4
6H	20.0	21.3	20.3	21.6	21.8	19.9	21.2	20.3	21.5	21.8
8H	20.1	21.4	20.5	21.6	21.9	20.0	21.3	20.4	21.5	21.8
12H	20.2	21.4	20.6	21.7	22.0	20.1	21.2	20.4	21.5	21.8
4H 2H	18.0	19.4	18.3	19.6	19.9	18.0	19.4	18.3	19.6	19.9
3H	19.8	21.0	20.2	21.3	21.6	19.8	21.0	20.1	21.3	21.6
4H	20.6	21.6	20.9	22.0	22.3	20.5	21.6	20.9	21.9	22.2
6H	21.1	22.1	21.5	22.4	22.8	21.0	22.0	21.4	22.3	22.7
8H	21.3	22.2	21.7	22.5	22.9	21.2	22.1	21.6	22.4	22.8
12H	21.4	22.2	21.8	22.6	23.0	21.2	22.1	21.7	22.4	22.8
8H 4H	20.8	21.7	21.2	22.1	22.5	20.8	21.7	21.2	22.1	22.4
6H	21.5	22.3	22.0	22.7	23.1	21.4	22.2	21.9	22.6	23.0
8H	21.8	22.5	22.3	22.9	23.3	21.7	22.3	22.1	22.8	23.2
12H	22.0	22.6	22.5	23.0	23.5	21.8	22.4	22.3	22.8	23.3
12H 4H	20.8	21.7	21.3	22.1	22.5	20.8	21.6	21.2	22.0	22.4
6H	21.6	22.3	22.1	22.7	23.1	21.5	22.2	22.0	22.6	23.0
8H	21.9	22.5	22.4	22.9	23.4	21.8	22.3	22.2	22.8	23.3
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 2572 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 3.3)
Area: 0.1 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) k(RI) x RCR = 5									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	47	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	83	72	65	81	71	64	78	70	63	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	83	77	69
2.50	99	91	85	97	89	84	93	87	82	74
3.00	102	95	90	100	94	88	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004				Suspended				SHRNM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

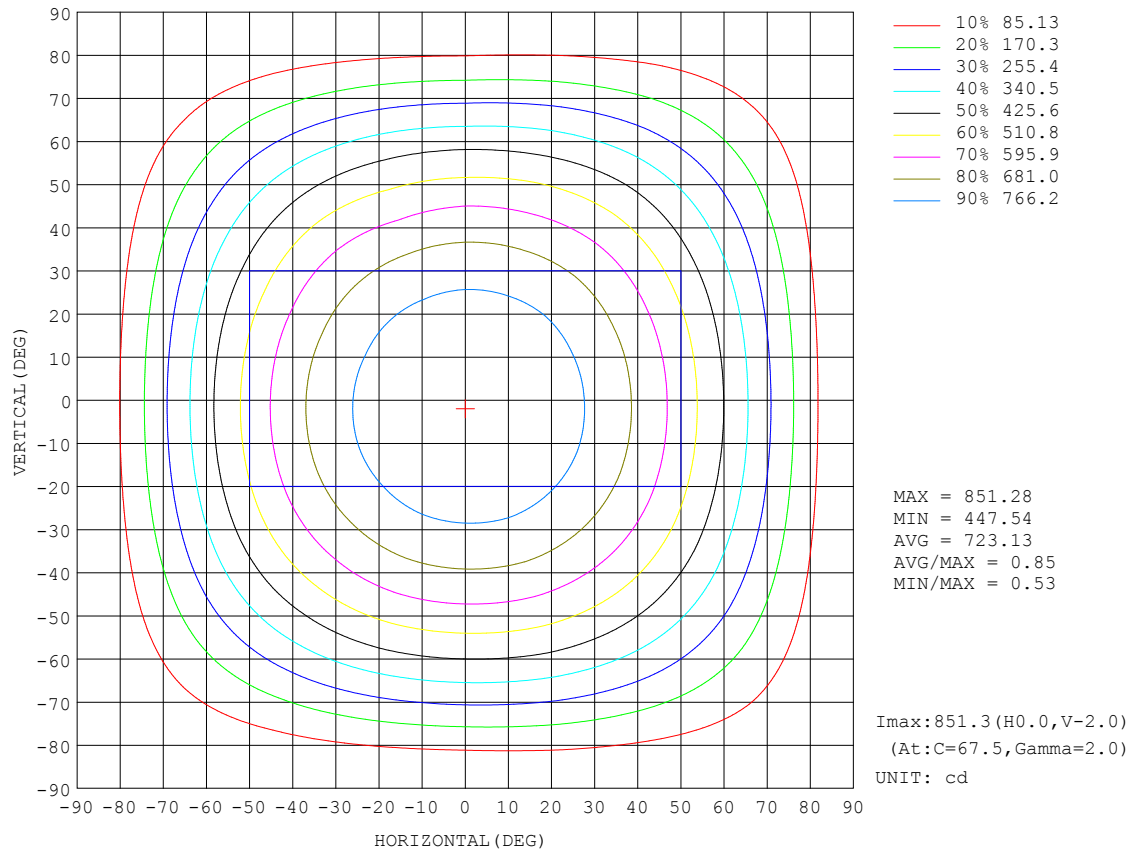


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

AAI Figure

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

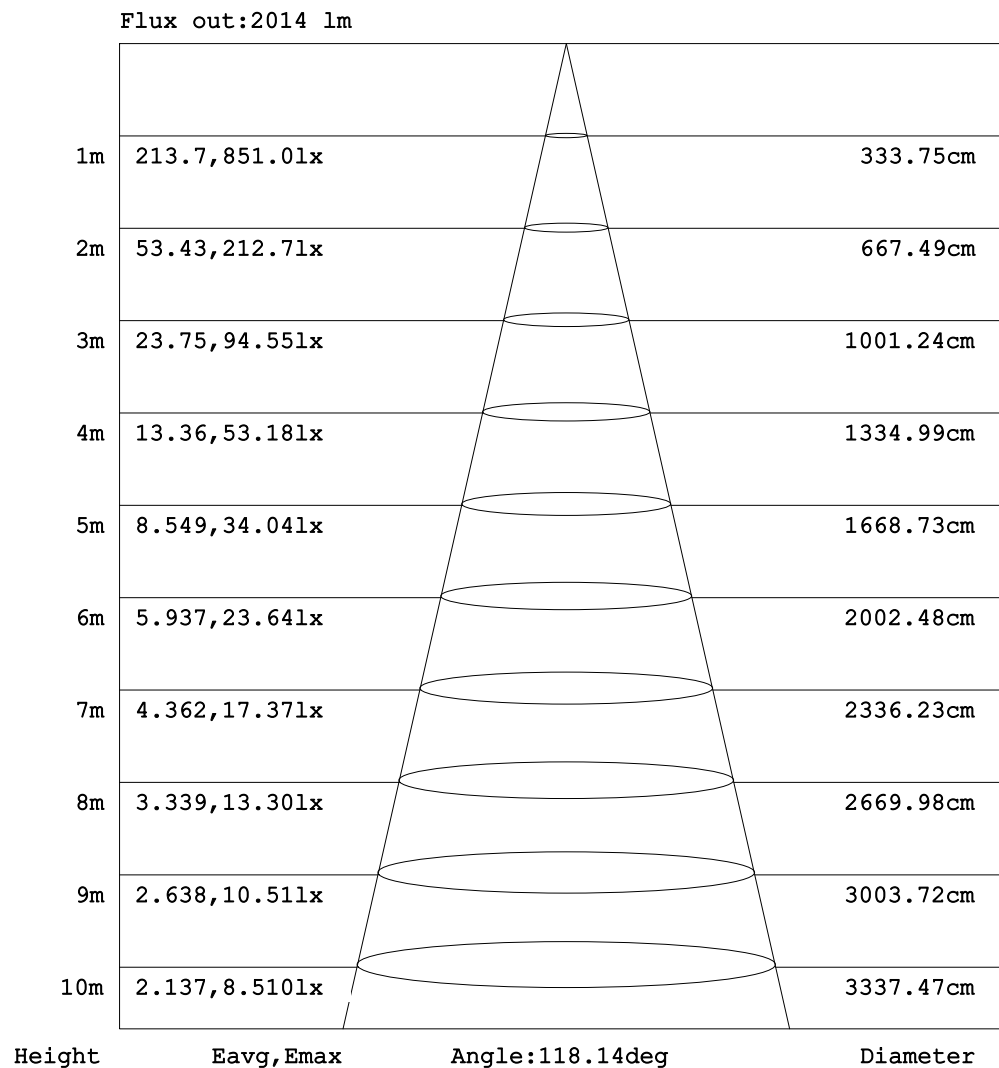


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 14 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 9.480m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:

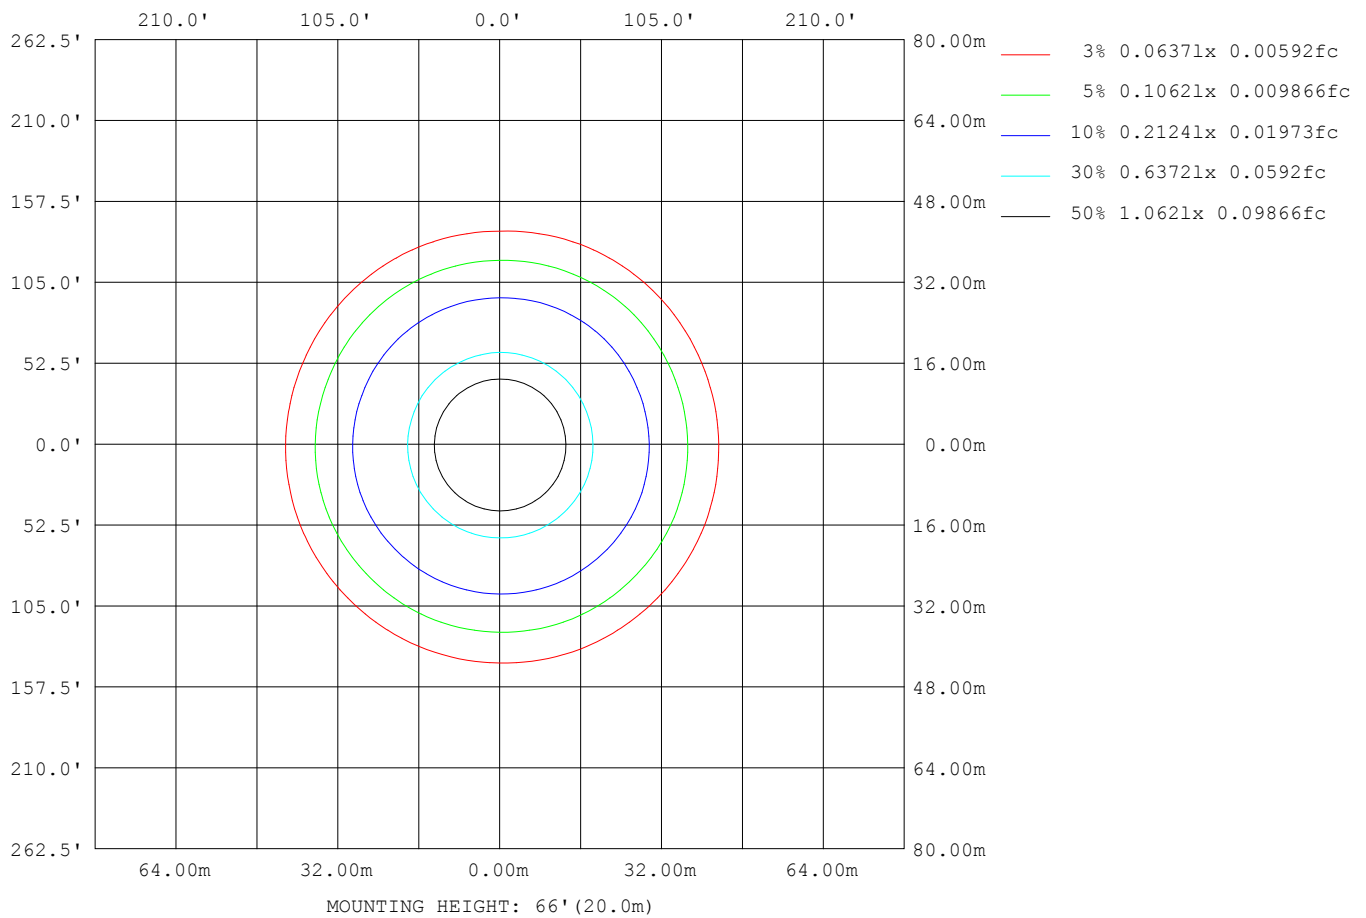

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity:65.0%
 Test Distance:9.480m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7942
L_0~180 (75) av	6753
L_0~180 (85) av	4145
L_90~270 (65) av	7846
L_90~270 (75) av	6552
L_90~270 (85) av	3292
L_45 (65) av	7941
L_45 (75) av	6728
L_45 (85) av	4046

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:14 June 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:9.480m [K=1.0000]
Remarks:

Planar Illuminance Curve

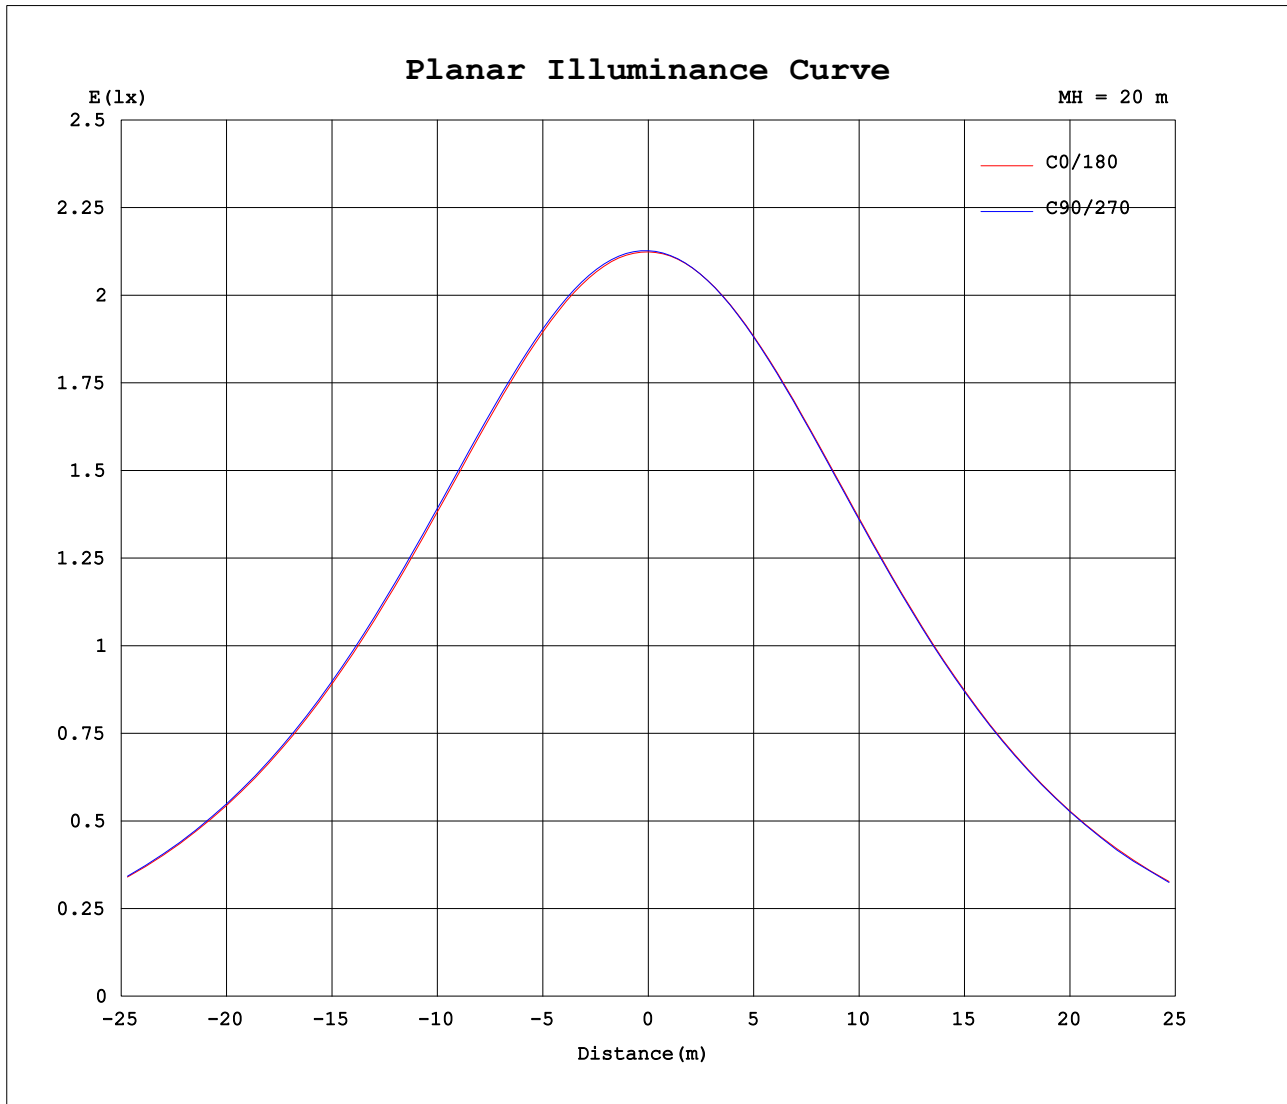

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 14 June 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
 Humidity: 65.0%
 Test Distance: 9.480m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.239V I:1.1034A P:26.744W PF:1.0000 Freq:0Hz Lamp Flux:2571.69x1 lm																	
NAME:									TYPE:						WEIGHT:		
SPEC.:									DIM.:						SERIAL No.:		
MFR.: EVERFINE									SUR.:						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	850	850	850	850	850	850	850	850	850	850	850	850	850	850	850	850			
5	849	850	850	850	850	849	849	848	847	846	846	846	846	846	847	848			
10	841	843	844	844	843	842	841	840	838	836	835	835	836	837	839	840			
15	828	831	832	832	831	829	827	825	822	820	819	818	820	821	824	825			
20	808	812	813	814	812	810	807	805	801	797	796	796	798	800	803	805			
25	783	787	789	790	787	785	780	778	773	769	768	767	770	772	776	778			
30	751	756	757	759	755	753	748	744	739	734	733	732	736	738	743	746			
35	712	718	720	721	717	714	708	705	699	693	692	691	695	698	704	706			
40	668	674	676	677	673	669	662	658	652	645	644	644	648	652	658	661			
45	617	624	625	626	621	617	609	605	599	591	591	585	596	600	607	610			
50	559	566	567	568	562	558	549	546	539	531	531	524	536	541	548	551			
55	495	503	504	504	497	492	483	480	473	465	465	464	467	476	484	487			
60	425	433	433	433	425	420	411	408	400	392	393	393	392	405	414	417			
65	350	357	357	356	348	342	333	328	322	316	315	317	315	330	338	342			
70	270	276	276	274	266	259	251	248	241	235	236	237	236	250	258	262			
75	189	194	193	191	182	176	168	167	161	155	156	157	157	170	178	182			
80	110	116	113	111	102	97.2	91.0	91.3	86.6	82.0	83.6	83.4	82.7	94.4	103	106			
85	44.7	48.9	46.0	42.9	36.0	32.6	29.8	31.3	27.5	25.0	25.8	24.5	21.4	32.1	39.5	41.9			
90	1.68	4.84	3.26	0.57	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92			
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:DAMIN

Test Date:14 June 2022

γ Range: 0 - 180DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443

Humidity:65.0%

Test Distance:9.480m [K=1.0000]

Remarks: