


## Ecodesign LED Strip

### PRODUCT SPECIFICATION



### Key Feature

- ◆ LM-80 approved LED
- ◆ High Efficiency: 101~130Lm/w Max.
- ◆ 50,000 hours Lifetime, 5 years warranty
- ◆ Multiple Color Option : 1800k ~ 10000k
- ◆ Only one Bin, SDCM<3, or SDCM<2 available
- ◆ CRI Option: Ra 80 as standard, Ra>90/95/97 all available



### Shenzhen Mingxue Optoelectronics Co., Ltd.

Office: 14F, Building T3 HIPARK Complex, Shiyao BaoAn District  
Shenzhen, China

Factory: Building 9 & 10, WanYang park, baoyong industry road No 8,  
west area

baoyong industry zone, longjiang town, Shunde District, FO SHAN city

Tel: +86-755-27637866

Tel: +86-755-27638086


E-mail: info@mingxue.cn

Web: www.mingxueled.com

www.mingxueled.com



## Drawing:

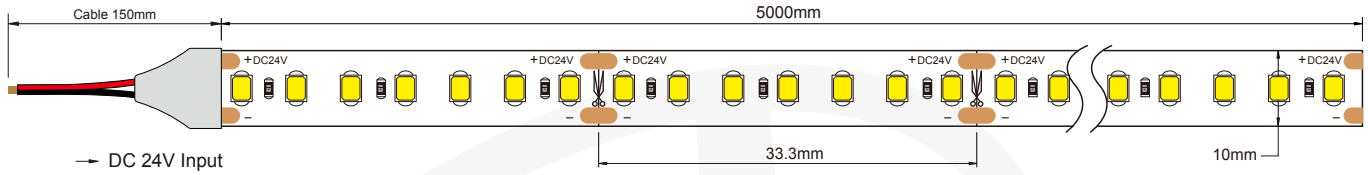

### Notice:

Safety Input Voltage: DC 24V

Size of each section is 33.3mm (1.3"), and cutting at "scissors symbol" place.

LED Strip length's length tolerance is  $\pm 0.2\%$ mm, width tolerance is  $\pm 0.2$ mm.

## Optical

LED type:	SMD2835
Color rendering index:	80/90
CCT Range:	2700K, 3000K, 4000K, 5000K, 6000K,
Irritation angle:	120°
Light Efficiency:	101~130 Lm/w
Lumen output/meter:	1950~2510 Lm/m (594~765LM/ft )

## Electric (24V)

Input current/m:	0.8A/m
Input Voltage:	DC24V
Voltage Power/m:	19.2W/m
Static Electricity:	1000V(ESD)
LEDs/meter:	210LEDs/m
Size of section:	33.3mm (1.3")
LEDs of section:	7 LEDs







## Others

Energy grade:	E
Warranty:	5years
Working hour:	50,000hrs lifetime for $T_c < 70^\circ\text{C}$
Working temperature:	$-20^\circ\text{C} \sim +45^\circ\text{C}$
Working humidity:	40%-70%RH
Measurement:	L5000*W10mm
Waterproof Rate:	IP20

## Descriptions:

- ◆ LED Strip can be used in many kinds of places as decorative lighting/backlight/, such as Ceiling trough, Staircase, Hall walkway, Billboard, Advertising sign, Bridge, Shopwindow, Cabinet etc. ;
- ◆ LED Project Strip can be 30m/roll, or 40m/roll Packaging. 100% of the lamps will be tested and keep lighting for 24h testing its quality reliability, and we also test it temperature after 24 hours's lighting;
- ◆ We can provide with different Custom products, such as printing Customer LOGO on FPC, Custom Aluminum Foil Bag Custom carton box/connector/DC cable/, Customs FPC design/color/width etc.

## Waterproof Rate :






### IP Rate Description :

- IP20 : Indoor use
- IP54 Nano : No Color shift with high Color Consistency
- IP65 PU : No Lead and mercury, Strong adhesion
- IP65 Silicon : Anti-UV ability, never become yellow
- IP67 : Lead-free and mercury-free, Strong adhesion
- IP68 : Silicon glue with Anti-UV, never change color

## Wiring diagram application :

◆ Single end power input for 5 meters

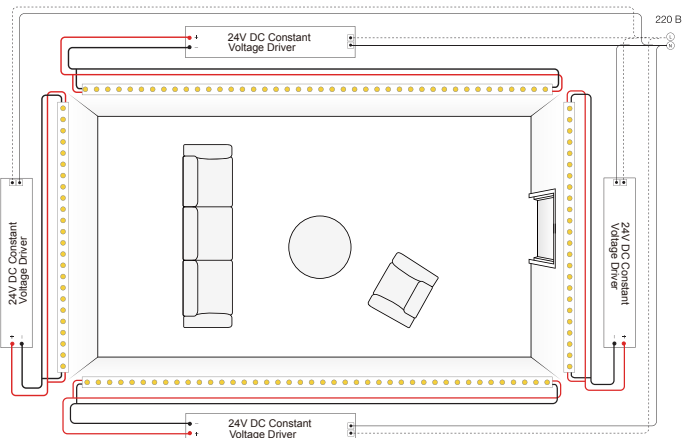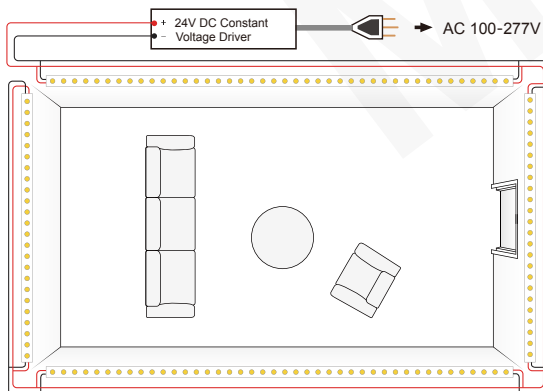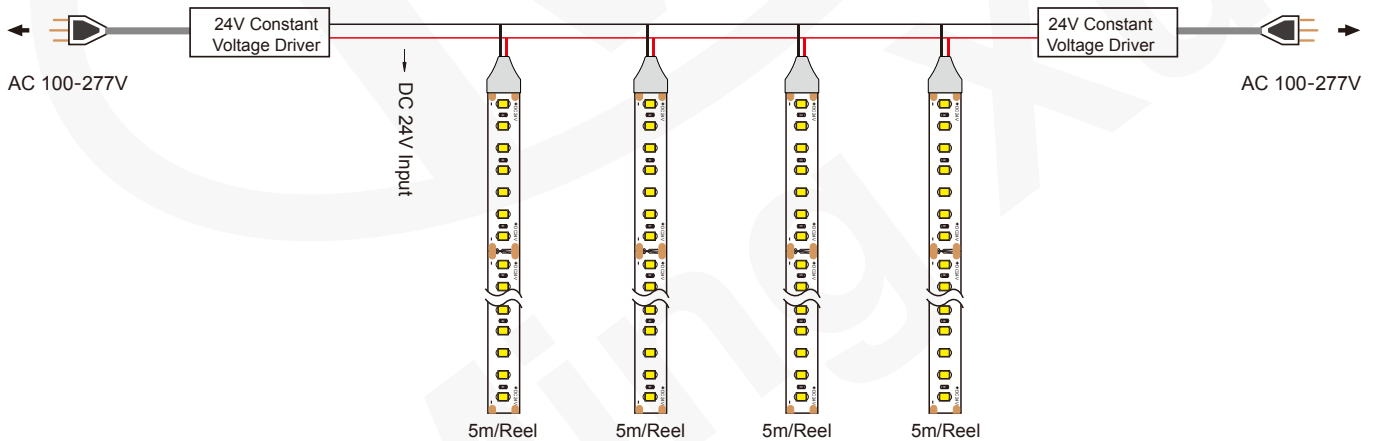

## 3M Adhesive Tape



3M 200 LSE Type  
(Economy Type)



3M 300 LSE Type  
(Mid-quality Type)




3M VHB RED  
(High-quality Type)

## Packaging


### Aluminium foil bag




### Plastic reel

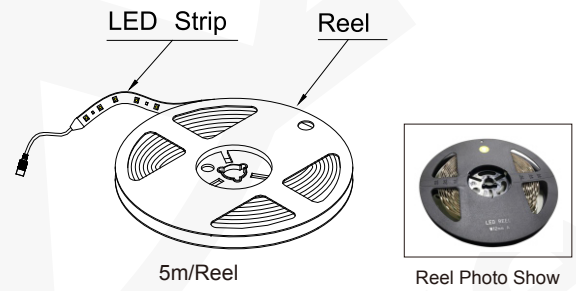

### Carton box

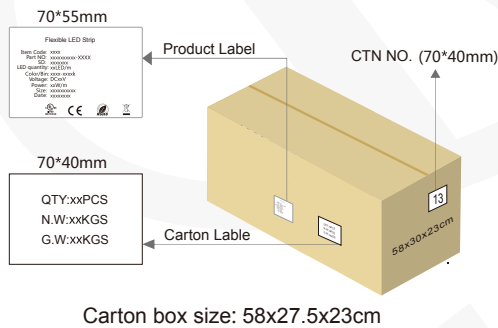

### Packing Number

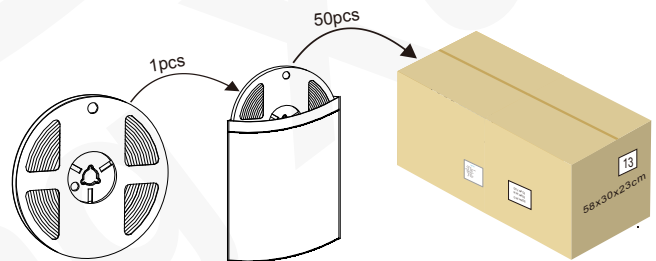


## Strip Code :


Item Code	LEDs/meter	Input voltage	Watt/m	CCT/K	Color Rendering Index	Lm/m	Lm/ft	LM/w	IP Rate	PCB width
MF328V210A80-D027A1A10	210	24V	19.2	2700K	80 90	2,240 1,950	682 594	116 101	IP20	10MM
MF328V210A80-D030A1A10	210	24V	19.2	3000K	80 90	2,360 2,050	719 625	122 107	IP20	10MM
MF328W210A80-D040A1A10	210	24V	19.2	4000K	80 90	2,496 2,169	760 661	130 117	IP20	10MM
MF328W210A80-D050A1A10	210	24V	19.2	5000K	80 90	2,505 2,190	763 667	137 118	IP20	10MM
MF328W210A80-D060A1A10	210	24V	19.2	6000K	80 90	2,510 2,200	765 670	130 114	IP20	10MM

## ⚠ Cautions:

≤50 mm diameter of wrapped object prohibited

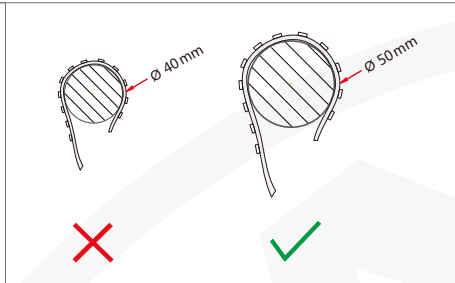

Touching LED, pls wear the electrostatic ring for avoiding ESD

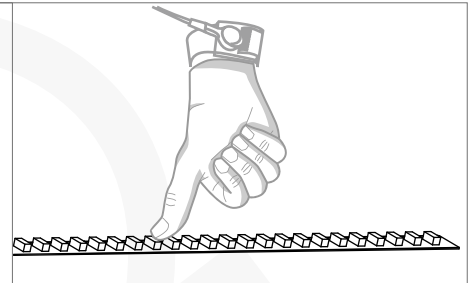

## Safety Information

Application notes for led flexiable strip

**In order to drive LED flexible strip lights safely, it is absolutely necessary to operate them with an electronically stabilised power supply protecting against short circuits, overload and overheating.**

**To also ease the luminaire/installation approval, electronic control gear, power supply and all electronic accessories for LED or LED modules should carry "CE, or UL" mark and meet the latest safety standard.**

- Please use 24VDC isolated power supply to drive the led strip, and the constant voltage source ripple less than 5%. Can't step-down the power by resistance-capacitance and nun-isolated power supply driver led strip, etc.
- To ensure the longevity and reliability of the strips, please do not bend the arc diameter 60mm or less, do not fold to avoid damaging the lamp beads or broken.
- To ensure the life and environment of lights, in the use of force can not pull the power cord to avoid damage to prohibit collision LED lights.
- During the installation of positive and negative attention to the power cord, do not pick the wrong voltage power supply and the product are the same, so as to avoid damage to the product.
- LED lights should be stored in dry sealed environment, the proposed storage period should not be too long before using unpacking, the working temperature: -20 ~ + 45 , Storage temperature: -0 ~ + 60 , not waterproof lights band indoor use, relative humidity not higher than 70%.
- In practical applications, the power supply should leave 20% margin (recommend using only 80% of the power) in order to ensure a sufficient amount of voltage drive products
- Do not use any acidic, alkaline adhesive securement products (including not limited to glass, plastic, etc.)